




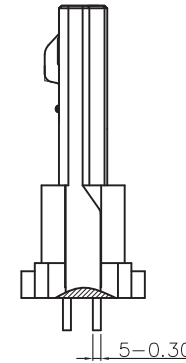
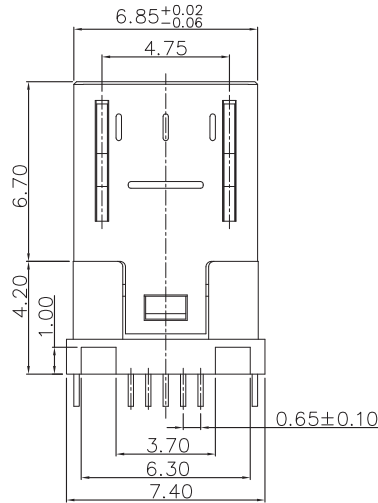


DETAILED A
SCALE 1:1

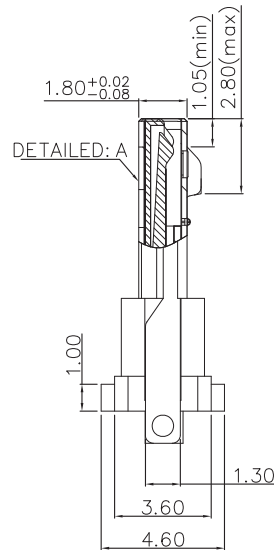

RECOMMENDED P.C.B LAYOUT

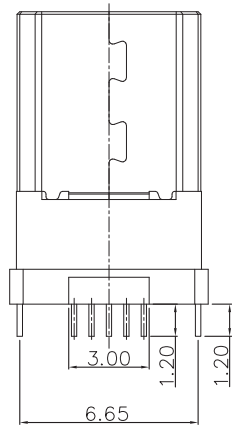

Code	Contact Plated
=0	Gold Flash (around 1u")
=1	Au Plated (3u")
=2	Au Plated (5u")
=3	Au Plated (10u")
=4	Au Plated (15u")
=5	Au Plated (30u")

7	TERMINAL C	PHOSPHOR BRONZE T=0.2mm	1	See table
6	TERMINAL B	PHOSPHOR BRONZE T=0.2mm	2	See table
5	TERMINAL A	PHOSPHOR BRONZE T=0.2mm	2	See table
4	SNAP	SUS304 T=0.4mm	1	
3	SHELL	SUS304 T=0.2mm	1	Ni PLATED
2	CAP	LCP UL94V-0	1	BLACK
1	HOUSING	LCP UL94V-0	1	BLACK
NO.	PART NAME	MATERIAL	QTY	FINISH



TITLE: **Micro USB 2.0 Conn. Male Dip Type**
 MODEL NO. **UCB23DB3_40-99R**

WELL LONG ELECTRONIC COMPONENTS LTD.

Tel: (852)2348 9203 / (769)8398 3456

E-mail: sales@welllong.com.hk

APPROVED:	S. HUANG	UNIT: MM	
CHECKED:	S. HUANG	SCALE: 1:1	
DRAWN:	Angla		
DATE:	2015/01/27		
ITEM	REVISION	REV BY	DATE

GENERAL TOLERANCE
 .X: ±0.30 .X° : ±2°
 .XX: ±0.20 .XX° : ±1°
 .XXX: ±0.10 .XXX° : ±0.5°